
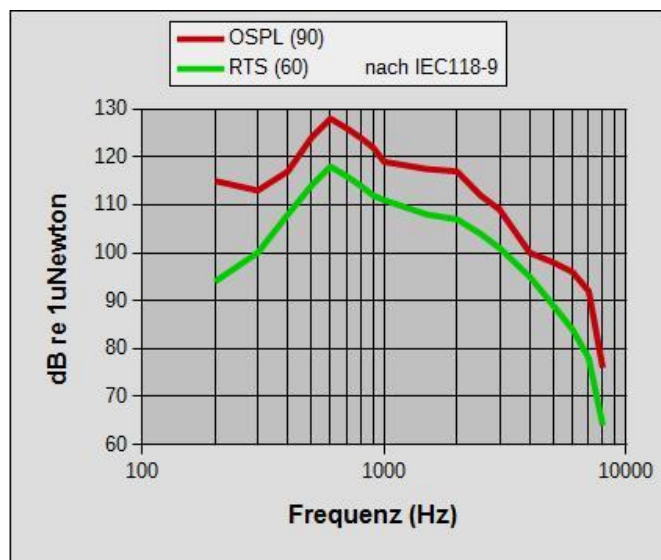


WDRC	•
Feedback canceler	• 3 Generation
Noise reduction	•
MPO programmable	•
Trimmer TC	•
Volume control	•
Frequenzy bands	12
Frequenzy bands fix	–
Frequenzy.bands variable	•
Channels	8
Programs	4
Program button	•
Programs button tones	•
Low battery tones	•
Data logging	•
Telecoil	○
Microphones	2
Adaptiv directional	•
External microphone	–
Housing color	black
Housing cover color standard	anthracite
Housing cover color option	gold/silver
Position BC conductor	above or below
Fitting with conexx cable	•
Fitting software	bruckhoff
NOAH 4.4.0	•
NOAH Link	–
Battery size 312	•
Battery size 13	○
	○ = optional

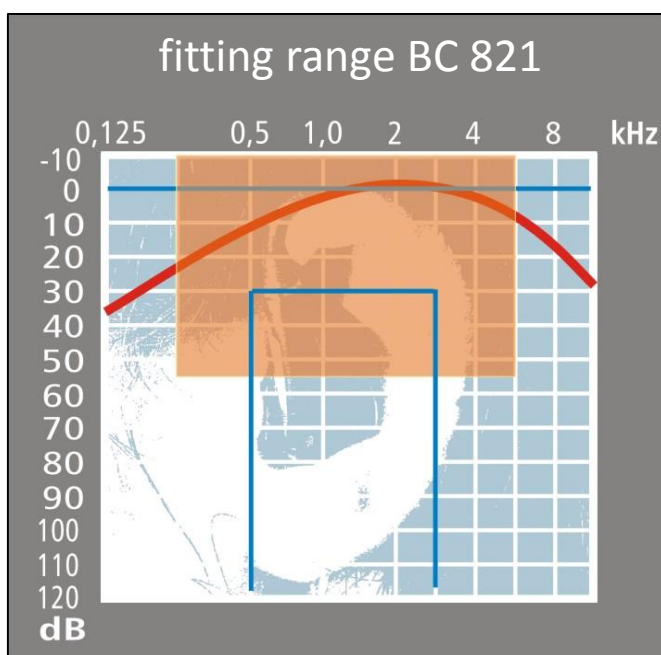

Technical data

		DIN IEC 118-9:1987
Maximum output force level (OFL @90dB)	(dB)	128
Max. acousto-mechanical force level (FOG @60dB)	(dB)	58
Frequency range	(Hz)	250-6000
Operating current	(mA)	1.8
Equivalent input noise	(dB)	29

A	click system	G	trimmer TC inside
B	housing cover	H	housing conductor
C	housing amplifier	I	program button
D	program socket	M1	front microphone
E	volume control	M2	rear microphone
F	battery flap		

